

## 1 SPECIFICATION OF SUPPLY

### 1.1 GAHP GS PLUS OUTDOOR VERSION

Water-ammonia absorption heat pump, gas-fired with natural gas, LPG or natural gas/hydrogen mixtures up to 20%, brine-water version, modulating down to 28% of the nominal heat input, condensing, for alternate or simultaneous production of hot water up to an outlet temperature of 65 °C (70 °C at 50% of maximum thermal input) and cold water even at negative temperatures (minimum outlet temperature -5 °C), for outdoor installation.

Nominal heat output (B0W35): 43,0 kW

GUE efficiency (B0W35): 165 %

Power recovered from renewable source (B0W35): 16,9 kW

Heat input: 26,0 kW

Electrical power absorption nominal: 0,41 kW

Power supply: 230 V - 50 Hz single-phase

Sound power Lw (max): 66,1 dB(A)

Weight: 287 kg

Dimensions: width 1056 mm, depth 729 mm, height 1280 mm

### 1.2 GAHP GS PLUS INDOOR VERSION

Water-ammonia absorption heat pump, gas-fired with natural gas, LPG or natural gas/hydrogen mixtures up to 20%, brine-water version, modulating down to 28% of the nominal heat input, condensing, for alternate or simultaneous production of hot water up to an outlet temperature of 65 °C (70 °C at 50% of maximum thermal input) and cold water even at negative temperatures (minimum outlet temperature -5 °C), for indoor installation.

Nominal heat output (B0W35): 43,0 kW

GUE efficiency (B0W35): 165 %

Power recovered from renewable source (B0W35): 16,9 kW

Heat input: 26,0 kW

Electrical power absorption nominal: 0,41 kW

Power supply: 230 V - 50 Hz single-phase

Sound power Lw (max): 66,1 dB(A)

Weight: 287 kg

Dimensions: width 923 mm, depth 729 mm, height 1280 mm

### 1.3 GAHP WS PLUS OUTDOOR VERSION

Water-ammonia absorption heat pump, gas-fired with natural gas, LPG or natural gas/hydrogen mixtures up to 20%, water-water version, modulating down to 28% of the nominal heat input, condensing, for alternate or simultaneous production of hot water up to an outlet temperature of 65 °C (70 °C at 50% of maximum thermal input) and cold water down to an outlet temperature of 3 °C, for outdoor installation.

Nominal heat output (W10W35): 45,3 kW

GUE efficiency (W10W35): 174 %

Power recovered from renewable source (W10W35): 19,3 kW

Heat input: 26,0 kW

Electrical power absorption nominal: 0,41 kW

Power supply: 230 V - 50 Hz single-phase

Sound power Lw (max): 66,1 dB(A)

Weight: 287 kg

Dimensions: width 1056 mm, depth 729 mm, height 1280 mm

### 1.4 GAHP WS PLUS INDOOR VERSION

Water-ammonia absorption heat pump, gas-fired with natural gas, LPG or natural gas/hydrogen mixtures up to 20%, water-water version, modulating down to 28% of the nominal heat input, condensing, for alternate or simultaneous production of hot water up to an outlet temperature of 65 °C (70 °C at 50% of maximum thermal input) and cold water down to an outlet temperature of 3 °C, for indoor installation.

Nominal heat output (W10W35): 45,3 kW

GUE efficiency (W10W35): 174 %

Power recovered from renewable source (W10W35): 19,3 kW

Heat input: 26,0 kW

Electrical power absorption nominal: 0,41 kW

Power supply: 230 V - 50 Hz single-phase

Sound power Lw (max): 66,1 dB(A)

Weight: 287 kg

Dimensions: width 923 mm, depth 729 mm, height 1280 mm

## 2 FEATURES AND TECHNICAL DATA

### 2.1 FEATURES

#### 2.1.1 Mechanical and thermo-hydraulic components

- ▶ Steel sealed circuit, externally treated with epoxy paint.
- ▶ Sealed combustion chamber (type C) suitable for outdoor installations.
- ▶ Metal mesh radiant burner, equipped with ignition electrodes and flame detection, managed by an electronic flame control box.
- ▶ Titanium stainless steel shell-and-tube water exchanger (condenser), externally insulated.
- ▶ Titanium stainless steel shell-and-tube water exchanger (evaporator), externally insulated.
- ▶ Low power consumption refrigerant fluid oil pump.
- ▶ Modulating premix burner group from 100% to 28% of the

nominal heat input.


- ▶ Stainless steel, shell-and-tube recovery exchanger of flue gas latent heat.

#### 2.1.2 Control and safety devices

- ▶ Electronic board featuring a microprocessor, LCD, and knob.
- ▶ Installation water flow meter (hot side).
- ▶ Installation water flow switch (cold side).
- ▶ Generator limit thermostat, with manual reset.
- ▶ Flue gas thermostat, with manual reset.
- ▶ Generator fins temperature probe.
- ▶ Sealed circuit safety relief valve.
- ▶ Bypass valve, between high and low-pressure circuits.
- ▶ Ionization flame control box.
- ▶ Double shutter electric gas valve.
- ▶ Condensate drain obstruction sensor.


## 2.2 DIMENSIONS

**Figure 2.1** Indoor GAHP GS/WS Plus dimensions

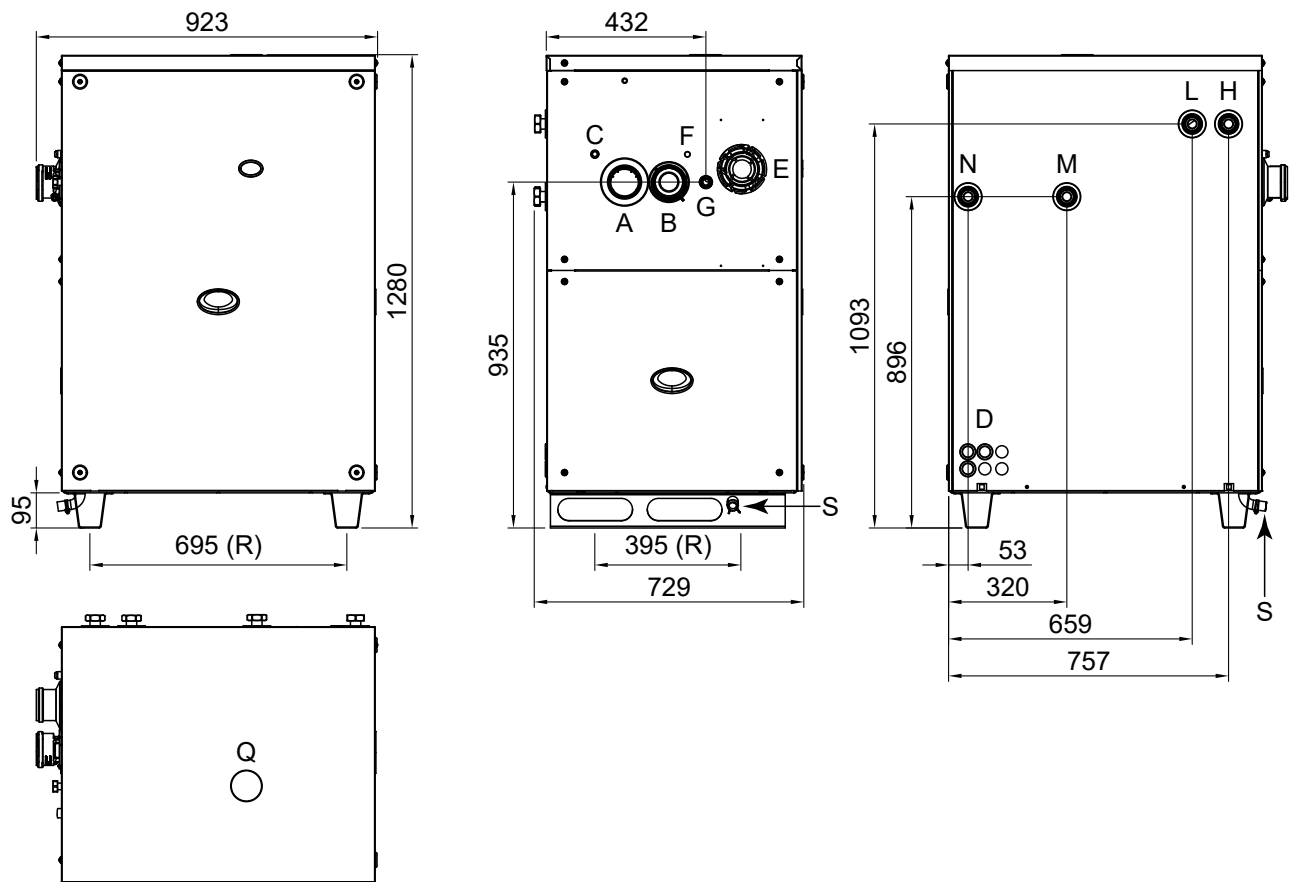

A	Flue gas outlet Ø 80 mm	F	Burner on warning light	N	Hot water outlet Ø 1 1/4" F
B	Combustion air intake Ø 80 mm	G	Gas connection Ø 3/4" F	Q	Safety valve drain ducting Ø 1 1/4"
C	Fumes thermostat manual reset	H	Hot water inlet Ø 1 1/4" F	R	Centre distance of holes for vibration damper supports
D	Power supply cables input	L	Renewable source water inlet Ø 1 1/4" F	S	Condensate drain connection
E	Ventilation fan	M	Renewable source water outlet Ø 1 1/4" F		

**Figure 2.2** Outdoor GAHP GS/WS Plus dimensions

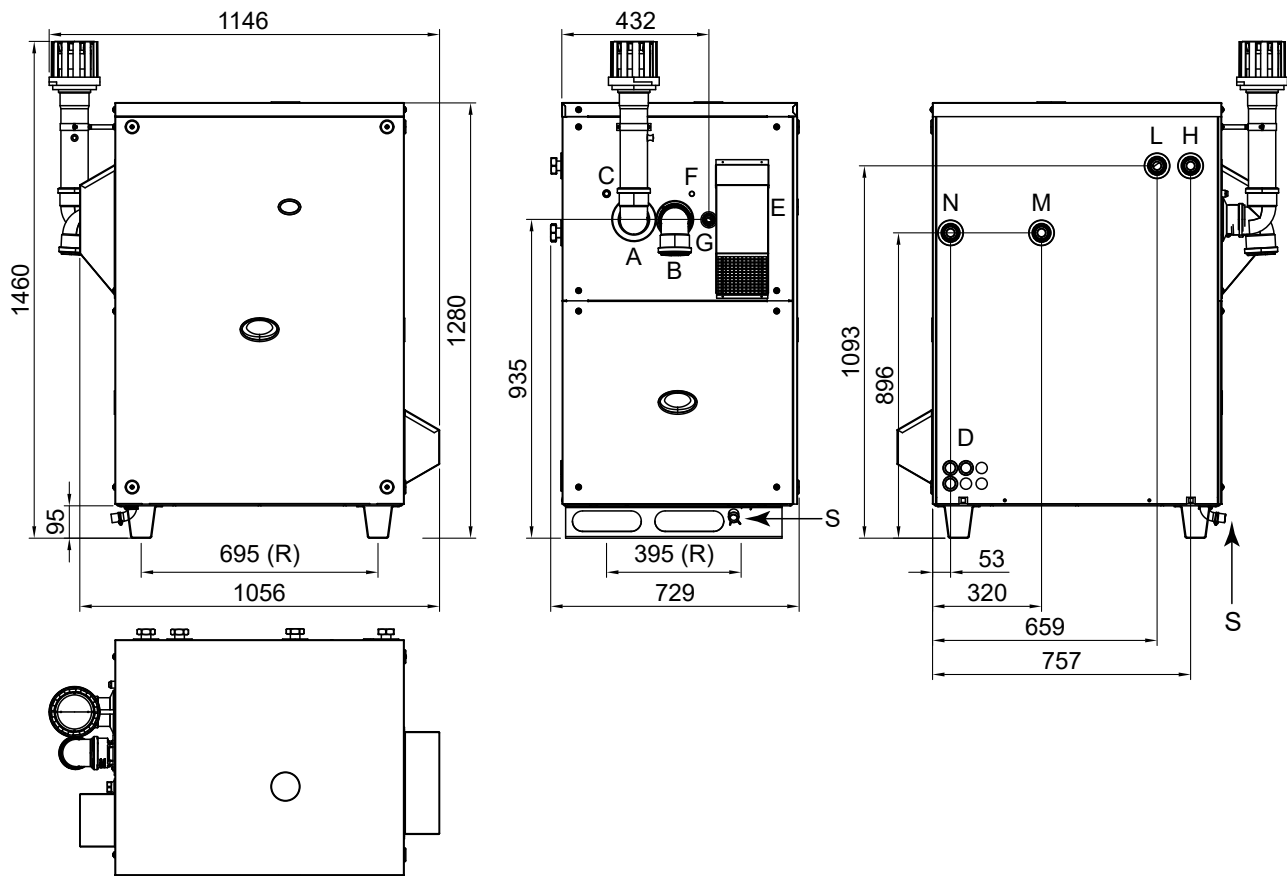

A	Flue gas outlet Ø 80 mm	F	Burner on warning light	N	Hot water outlet Ø 1 1/4" F
B	Combustion air intake Ø 80 mm	G	Gas connection Ø 3/4" F	R	Centre distance of holes for vibration damper supports
C	Fumes thermostat manual reset	H	Hot water inlet Ø 1 1/4" F	S	Condensate drain connection
D	Power supply cables input	L	Renewable source water inlet Ø 1 1/4" F		
E	Ventilation fan	M	Renewable source water outlet Ø 1 1/4" F		

## 2.3 CONTROLS

### Control device

The appliance may only work if it is connected to a control device, selected from:

- DDC panel
- CCI panel
- External request

#### 2.3.1 DDC panel

The DDC control panel can manage one or more Robur appliances in modulating mode (GA heat pumps, GAHP boilers) or ON/OFF mode (AY chillers).

DDC control panel functionality may be extended with auxiliary Robur devices RB100 and RB200 (e.g. service requests, DHW production, third party generator control, probe control, system valves or water pumps,...).



For more details see Section C01.11.

#### 2.3.2 CCI panel

The CCI control panel can manage up to 3 GAHP appliances in modulating mode (i.e. only GAHP A Plus/GAHP GS/WS Plus for heating only).



For more details see Section C01.11.

#### 2.3.3 External request

The appliance can also be controlled by a generic request device (e.g. thermostat, timer, switch, contactor...) fitted with a voltage-free NO contact. This system only allows basic control (on/off, with a fixed setpoint temperature), thus lacking essential system functions of the DDC control panel. We recommend using it only for simple applications and with a single appliance. There are two control options: either a heating request or a cooling request.

## 2.4 TECHNICAL DATA

**Table 2.1** GAHP GS/WS Plus technical data

				GAHP GS Plus	GAHP WS Plus
Heating mode					
Seasonal space heating energy efficiency class (ErP)	medium-temperature application (55 °C)		-	A++	
	low-temperature application (35 °C)		-	A+	
Nominal heat output	Evaporator inlet temperature/Delivery temperature	B0W35	kW	43,0	-
		W10W35	kW	-	45,3
GUE efficiency	Evaporator inlet temperature/Delivery temperature	B0W35	%	165	-
		W10W35	%	-	174
Heat input	nominal (1013 mbar - 15 °C)		kW	26,4	
	real		kW	26,0	
Hot water outlet temperature	maximum for heating		°C	65	
	maximum for DHW		°C	70	
Hot water inlet temperature	maximum for heating		°C	55	
	maximum for DHW		°C	60	
	minimum temperature in continuous operation		°C	30 (1)	
Heating water flow	nominal (B0W35)		l/h	3000	-
	nominal (W10W35)		l/h	-	3200
	maximum		l/h	4000	
	minimum		l/h	2000	
Water pressure drop in heating mode	at nominal water flow		bar	0,46 (2)	0,52 (2)
Outdoor temperature (dry bulb)	maximum		°C	45	
	minimum		°C	0 (3)	
Renewable source operating conditions					
Power recovered from renewable source	Evaporator inlet temperature/Delivery temperature	B0W35	kW	16,9	-
		W10W35	kW	-	19,3
Renewable source water return temperature	maximum		°C	45	
Renewable source delivery water temperature	minimum		°C	-5	3
Renewable source water flow (with 25% glycol)	nominal (B0W35)		l/h	3020	-
	maximum		l/h	4000	-
	minimum		l/h	2000	-
	nominal (W10W35)		l/h	-	2850
Renewable source water flow	maximum		l/h	-	4700
	minimum		l/h	-	2300
	at nominal water flow		bar	0,57 (2)	0,40 (2)
Renewable source pressure drop					
Electrical specifications					
Power supply	voltage		V	230	
	type		-	single-phase	
	frequency		Hz	50	
Electrical power absorption	nominal		kW	0,41 (4)	
Degree of protection	IP		-	25	
Installation data					
Gas consumption	G20 natural gas (nominal)		m³/h	2,79	
	G25 (nominal)		m³/h	3,25	
	G25.1 (nominal)		m³/h	3,25	
	G25.3 (nominal)		m³/h	3,13	
	G27 (nominal)		m³/h	3,41	
	G2.350 (nominal)		m³/h	3,92	
	G30 (nominal)		kg/h	2,09	
	G31 (nominal)		kg/h	2,05	
NO <sub>x</sub> emission class			-	6	
Sound power L <sub>w</sub> (max)			dB(A)	66,1 (5)	
sound pressure L <sub>p</sub> at 5 metres (max)			dB(A)	44,1 (6)	
minimum storage temperature			°C	-30	
maximum water pressure in operation			bar	4,0	

(1) In transient operation, lower temperatures are allowed.

(2) For flows other than nominal see Design Manual, Pressure losses Paragraph.

(3) Data referred to the indoor version. For the outdoor version, the minimum ambient air temperature is -15 °C. A special outdoor version is available as an option for operation down to -30 °C.

(4) ±10% depending on power voltage and absorption tolerance of electric motors.

(5) Sound power values detected in compliance with the intensity measurement methodology set forth by standard EN ISO 9614; C type installation.

(6) Maximum sound pressure levels in free field, with directivity factor 2, obtained from the sound power level in compliance with standard EN ISO 9614; C type installation.

(7) Indoor version only.

(8) Overall dimensions excluding flue gas exhaust. Width indoor version 923 mm.

(9) Overall dimensions excluding flue gas exhaust.

(10) Packaging width for the indoor version is 934 mm.

(11) Packaging height for the indoor version is 1280 mm.

(12) Packaging depth for the indoor version is 746 mm.

(13) Weight of indoor version 307 kg.

(14) Weight of indoor version 301 kg.

(15) Tolerance ±5%.

			GAHP GS Plus	GAHP WS Plus
<b>maximum condensate flow</b>			l/h	4,2
<b>Water content inside the appliance</b>	hot side	l		4
	cold side	l		3
<b>Water fitting</b>	type	-		F
	thread	"		1 1/4
<b>Gas connection</b>	type	-		F
	thread	"		3/4
<b>safety valve drain ducting connection</b>			"	1 1/4 (7)
<b>Flue gas exhaust</b>	diameter (Ø)	mm		80
	residual head	Pa		90
<b>type of installation</b>			-	C13, C33, C43, C53, C63, C83, B23P, B33
<b>Dimensions</b>	width	mm		1056 (8)
	depth	mm		729
	height	mm		1280 (9)
	Packing	width	mm	1056 (10)
		height	mm	1488 (11)
		depth	mm	1056 (12)
<b>Weight</b>	in operation	kg		287 (13)
	gross (including packaging)	kg		281 (14)
<b>General information</b>				
<b>Refrigerating fluid (15)</b>	ammonia R717	kg	7,0	6,8
	water H <sub>2</sub> O	kg	10,0	
<b>maximum pressure of the refrigerating circuit</b>			bar	32

- (1) In transient operation, lower temperatures are allowed.  
 (2) For flows other than nominal see Design Manual, Pressure losses Paragraph.  
 (3) Data referred to the indoor version. For the outdoor version, the minimum ambient air temperature is -15 °C. A special outdoor version is available as an option for operation down to -30 °C.  
 (4) ±10% depending on power voltage and absorption tolerance of electric motors.  
 (5) Sound power values detected in compliance with the intensity measurement methodology set forth by standard EN ISO 9614; C type installation.  
 (6) Maximum sound pressure levels in free field, with directivity factor 2, obtained from the sound power level in compliance with standard EN ISO 9614; C type installation.  
 (7) Indoor version only.  
 (8) Overall dimensions excluding flue gas exhaust. Width indoor version 923 mm.  
 (9) Overall dimensions excluding flue gas exhaust.  
 (10) Packaging width for the indoor version is 934 mm.  
 (11) Packaging height for the indoor version is 1280 mm.  
 (12) Packaging depth for the indoor version is 746 mm.  
 (13) Weight of indoor version 307 kg.  
 (14) Weight of indoor version 301 kg.  
 (15) Tolerance ±5%.

## 2.4.1 Pressure drops

### 2.4.1.1 Condenser

Table 2.2 p. 5 shows the pressure drop data on the condenser side for GAHP GS/WS Plus appliances.

**Table 2.2 GAHP GS/WS Plus pressure drops on the condenser side**

Hot water flow	Heat transfer fluid temperature at outlet		
	35 °C	50 °C	65 °C
	bar	bar	bar
2000 l/h	0,23	0,21	0,19
3000 l/h	0,46	0,43	0,38
3200 l/h	0,52	0,48	0,43
4000 l/h	0,78	0,72	0,64

### 2.4.1.2 Evaporator

Table 2.3 p. 5 shows the pressure drop data on the evaporator side for the GAHP GS Plus appliance.

**Table 2.3 GAHP GS Plus pressure drops on the evaporator side**

Cold water flow	Heat transfer fluid temperature at outlet		
	-5 °C	0 °C	5 °C
	bar	bar	bar
2500 l/h	0,43	0,40	0,38
3000 l/h	0,57	0,54	0,52
3500 l/h	0,74	0,70	0,67

The data refer to operation with 25% glycol water.

Table 2.4 p. 5 shows the pressure drop data on the evaporator side for the GAHP WS Plus appliance.

**Table 2.4 GAHP WS Plus pressure drops on the evaporator side**

Cold water flow	Heat transfer fluid temperature at outlet	
	3 °C	7 °C
	bar	bar
2500 l/h	0,31	0,30
3000 l/h	0,44	0,43
3500 l/h	0,60	0,58

The data refer to operation with no glycol in water.

## 2.4.2 Performances

### 2.4.2.1 Heating

Table 2.5 p. 6 shows the heat output at full load and stable

operation, depending on the hot water outlet temperature to the system and the cold water inlet temperature from the renewable source for the GAHP GS Plus appliance.

**Table 2.5** GAHP GS Plus heat output

Evaporator inlet water temperature	Water delivery temperature							
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C	65 °C	70 °C (1)
	kW	kW	kW	kW	kW	kW	kW	kW
0 °C	43,0	41,7	40,3	38,8	36,7	34,6	32,4	14,0
5 °C	43,6	43,1	41,3	40,3	38,3	36,4	34,0	14,3
10 °C	43,7	43,1	42,3	41,3	39,6	38,3	36,4	16,0
15 °C	43,9	43,6	43,1	42,3	40,9	40,3	38,3	16,5

(1) Thermal input reduced to 50%

Data refer to the hot water delivery temperature to the system (condenser outlet).

Data refer to the cold water return temperature from the renewable source (evaporator inlet).

Table 2.6 p. 6 shows the GUE at full load and stable operation in heating mode, depending on the hot water outlet tempera-

ture to the system and the cold water inlet temperature from the renewable source, for the GAHP GS Plus appliance.

**Table 2.6** GUE GAHP GS Plus in heating mode

Evaporator inlet water temperature	Water delivery temperature							
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C	65 °C	70 °C (1)
	%	%	%	%	%	%	%	%
0 °C	165	161	155	149	141	133	125	108
5 °C	168	166	159	155	147	140	131	110
10 °C	168	166	163	159	152	147	140	123
15 °C	169	168	166	163	157	155	147	127

(1) Thermal input reduced to 50%

Table 2.7 p. 6 shows the heat output at full load and stable operation, depending on the hot water outlet temperature to

the system and the cold water inlet temperature from the renewable source for the GAHP WS Plus appliance.

**Table 2.7** GAHP WS Plus heat output

Evaporator inlet water temperature	Water delivery temperature							
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C	65 °C	70 °C (1)
	kW	kW	kW	kW	kW	kW	kW	kW
10 °C	45,3	44,6	43,8	42,9	40,8	38,9	36,9	14,0
15 °C	45,3	44,9	44,4	43,9	41,9	40,0	38,1	14,6
20 °C	45,3	44,9	45,0	45,0	43,0	41,2	39,3	15,1
25 °C	45,3	44,9	45,0	45,0	44,1	42,3	40,5	15,6

(1) Thermal input reduced to 50%

Data refer to the hot water delivery temperature to the system (condenser outlet).

Data refer to the cold water return temperature from the renewable source (evaporator inlet).

Table 2.8 p. 6 shows the GUE at full load and stable operation in heating mode, depending on the hot water outlet tempera-

ture to the system and the cold water inlet temperature from the renewable source, for the GAHP WS Plus appliance.

**Table 2.8** GUE GAHP WS heating mode

Evaporator inlet water temperature	Water delivery temperature							
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C	65 °C	70 °C (1)
	%	%	%	%	%	%	%	%
10 °C	174	172	168	165	157	150	142	108
15 °C	174	173	171	169	161	154	147	112
20 °C	174	173	173	173	166	158	151	116
25 °C	174	173	173	173	170	163	156	120

(1) Thermal input reduced to 50%



Please consider that, according to the actual heating load, the appliance may often need to operate under partial load conditions and in non-stationary operation.

### 2.4.2.2 Power recovered from renewable source



**Cooling performance corresponds to the power recovered from the renewable energy source**

In cooling mode, the return temperature from the system corresponds to the inlet temperature of the evaporator, while the water delivery temperature corresponds

to the outlet temperature to the thermal energy dissipation system (geothermal probes or heat exchanger).

Table 2.9 p. 7 shows the power recovered from the renewable energy source at full load and stable operation, depending on the hot water outlet temperature to the system and the cold water inlet temperature from the renewable source for the GAHP GS Plus appliance.

**Table 2.9** Power recovered from renewable source GAHP GS Plus

Evaporator inlet water temperature	Water delivery temperature					
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
	kW	kW	kW	kW	kW	kW
12 °C	18,2	18,0	18,0	17,6	17,3	16,3
15 °C	18,5	18,3	18,2	18,1	17,8	17,1

Data refer to the hot water delivery temperature to the system (condenser outlet).  
Data refer to the cold water return temperature from the renewable source (evaporator inlet).

Table 2.10 p. 7 shows the GUE at full load and stable operation in cooling mode, depending on the cold water inlet temperature from the system and the hot water outlet temperature to the dissipation system, for the GAHP GS Plus appliance.

**Table 2.10** GUE GAHP GS Plus in cooling mode

Evaporator inlet water temperature	Water delivery temperature					
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
	%	%	%	%	%	%
12 °C	70	69	69	68	67	63
15 °C	71	70	70	69	69	66

Table 2.11 p. 7 shows the power recovered from the renewable energy source at full load and stable operation, depending on the hot water outlet temperature to the system and the cold water inlet temperature from the renewable source for the GAHP WS Plus appliance.

**Table 2.11** Power recovered from renewable source GAHP WS Plus


Evaporator inlet water temperature	Water delivery temperature					
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
	kW	kW	kW	kW	kW	kW
12 °C	19,3	18,8	18,1	17,3	15,3	13,3
15 °C	19,3	19,0	18,5	18,0	15,9	14,0

Data refer to the hot water delivery temperature to the system (condenser outlet).  
Data refer to the cold water return temperature from the renewable source (evaporator inlet).

Table 2.12 p. 7 shows the GUE at full load and stable operation in cooling mode, depending on the cold water inlet temperature from the system and the hot water outlet temperature to the dissipation system, for the GAHP WS Plus appliance.

**Table 2.12** GUE GAHP WS Plus in cooling mode

Evaporator inlet water temperature	Water delivery temperature					
	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
	%	%	%	%	%	%
12 °C	74	72	69	67	59	51
15 °C	74	73	71	69	61	54

 Please consider that, according to the actual heat exchange with the renewable source (or cooling load), the


appliance may often operate under partial load conditions and in non-steady operation.

### 3 DESIGN


#### Compliance with installation standards

Design and installation must comply with applicable regulations in force, based on the installation Country and site, in matters of safety, design, implementation and maintenance of:


- heating systems
- cooling systems
- gas systems
- flue gas exhaust
- flue gas condensate drain

 Design and installation must also comply with the manufacturer's provisions.

#### 3.1 APPLIANCE POSITIONING


 Please refer to Section C01.02.

#### 3.2 PLUMBING DESIGN

 Please refer to Section C01.03.

#### 3.3 WATER PUMP

The circulation pump (flow and head) must be selected and installed based on pressure drops of plumbing/primary circuit (piping + components + exchange terminals + appliance). For appliance pressure drops see Paragraph 2.4.1.1 p. 5 (for condenser side) and Paragraph 2.4.1.2 p. 5 (for evaporator side).

 Please refer to Section C01.04 for the characteristics of the pumps available as Robur optional.



### 3.4 SYSTEM WATER QUALITY



Please refer to Section C01.05.

### 3.5 ANTIFREEZE PROTECTION



Please refer to Section C01.06.

### 3.6 FUEL GAS SUPPLY



Please refer to Section C01.08.

### 3.7 FLUE GAS EXHAUST



#### Compliance with standards

The appliance is approved for connection to a combustion products exhaust duct for the types shown in Table 2.1 p. 4.

#### 3.7.1 Flue gas exhaust connection

Ø 80 mm (with gasket), on the left side, at the top, side panel (detail A Figures 2.1 p. 2 and 2.2 p. 3).


#### 3.7.2 Indoor version

The appliance is supplied in configuration type B63.

#### 3.7.3 Outdoor version

The appliance is supplied complete with air intake and flue gas exhaust kit to be fitted by the installer, shown in Figure 3.1 p. 8.

**Figure 3.1** Flue gas exhaust outdoor version

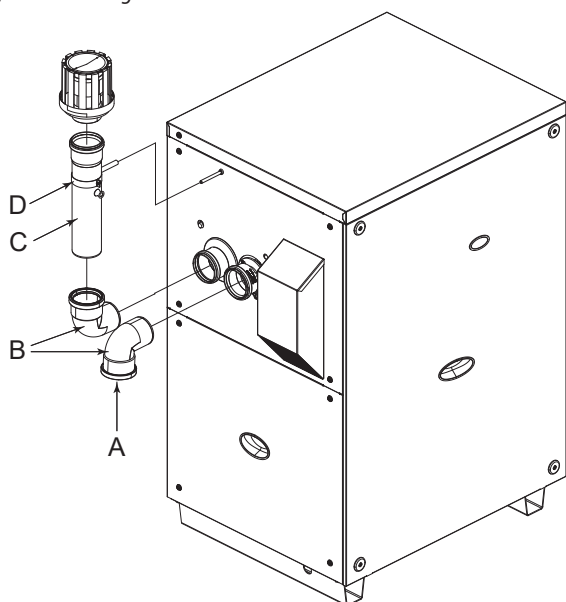

- A Air intake  
B 90° elbow Ø 80 mm  
C Pipe Ø 80 mm, length 300 mm,  
D Collar with terminal

#### 3.7.4 Possible flue

If required, the appliance may be connected to a flue appropriate for condensing appliances.



For more details see Section C01.09.

### 3.8 FLUE GAS CONDENSATE DRAIN



Please refer to Section C01.09.

### 3.9 SAFETY VALVE DRAIN (INDOOR VERSION)

Ø 1 1/4", on the upper panel (detail Q Figure 2.1 p. 2).



The safety valve drain must be mandatorily ducted outside. Failure to comply with this provision jeopardizes first start-up.



Do not install any shut off device on the drain duct between the safety valve and the outside vent.

#### 3.9.1 Safety valve drain ducting

The drain ducting shall be made in steel pipes (do not use copper or its alloys). Table 3.1 p. 8 provides sufficient criteria of pipe sizing; alternatively, less compelling sizing is accepted, provided it is compliant with specific applicable norms (the manufacturer cannot be held liable).

**Table 3.1** Safety valve drain ducting

Diameter	DN	Maximum length (m)
1" 1/4	32	30
2"	50	60



The drain duct must have an initial straight section of at least 30 cm.



Place the drain terminal outside the room, away from doors, windows and aeration vents, and at such a height that any refrigerant leaks cannot be inhaled by any people.

### 3.10 ELECTRICAL AND CONTROL CONNECTIONS



Please refer to Section C01.10.

### 3.11 EXAMPLE DIAGRAMS



Please refer to Section C01.13.

### 3.12 ACOUSTIC



Please refer to Section C01.14.